

VAN DE VELDE
PACKAGING

Vekopak

PRINT PROCESS



Print Process	Offset
Maximum numbers of Colours	7 - (when using Coldfoil max 5 colours)
Colour print sequence	Black - Cyaan - Magenta - Yellow Metallics (inkt / foil) are printed first
Type of inkt	Conventional & UV (Food grade)
Type of varnish	Glossy / Matt / Spot-UV / Drip-off / Soft Touch
Profile	Fogra 39 / cmyk modus
Substrates that can be printed	Carton Board

COMPOSITION OF PREPRESS FILES

Software	Adobe Creative Cloud / Packz	
Resolution of images	300 dpi	
Minimum dot in file (%)	2%	
Maximum dot in file (%)	100%	
Minimum size for text (pt)	Positive 4,5pt	Negative 5,5pt
Minimum line thickness (pt)	Positive 0,25pt	Negative 0,30pt
Bleed (mm)	3mm	
Trapping (pt)	0,25pt (centered - Provided by Vekopak)	
Pull-back white (pt)	-0,125pt (Provided by Vekopak)	
Barcode	BWR 15 Micron	Minimum size 80% (preferably Black)
Total inkt coverage(%)	330%	

ADDITIONAL INFORMATION

Comments	BRC-Certified / FSC-Certified
Pre-press	make spot-uv / Embossing in separate layer, and save the file and HR pdf incl layer

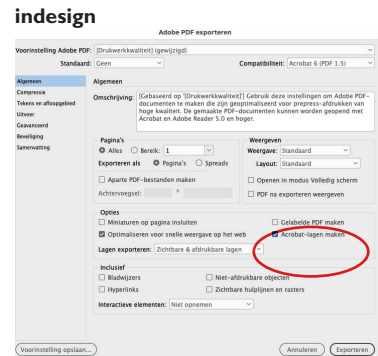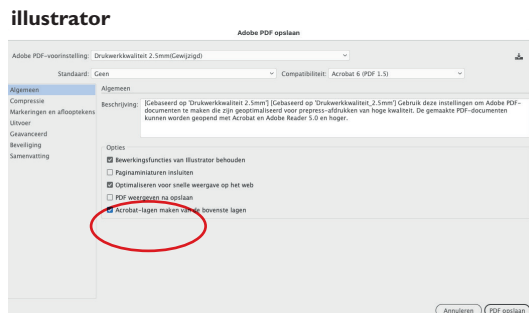

if artwork deviates from the above specs and cannot be produced, adjustment to the quote is necessary



ABN-AMRO Bank Tilburg - IBANnr: NL84ABNA0415835429 BICcode: ABNANL2A - EORI : NL817502919
K.v.K. Tilburg nr. 18086298 - BTW-nr: NL817502919B01 - Statistieknummer : 48192000
Prijsopgaven en leveringen geschieden volgens de leveringsvoorwaarden voor de Grafische Industrie, laatstelijk
gedeponeerd in januari 2022 onder nr. 1/2022 ter griffie van de Rechtbank te Amsterdam. Desgevraagd wordt
u een exemplaar toegezonden.